

Panel PC

Intel[®] x86



Panel PC powered by Microsoft Windows[®]

Extended connectivity with dual Ethernet and Mini-PCI for multiple fieldbuses

Enhanced heat-dissipation through aluminium case

Solid state UPS

Optional VPN kit

Extremely compact depth – 29 mm only!

Pixsys srl



Via Po 16, I - 30030 Mellaredo di Pianiga VE
Ph. +39 041 519 0518 • Fax +39 041 519 0027

www.pixsys.net - sales@pixsys.net



Dimensions (mm)

Model	L	H	W	L (cut-out)	H (cut-out)
TD750	204	160	34	181	144
TD850	325	260	26	302	242
TD860	321	254	26	302	242
TD900	435	330	29	416	313
TD910	474	310	29	460	296
TD920	540	353	29	525	336

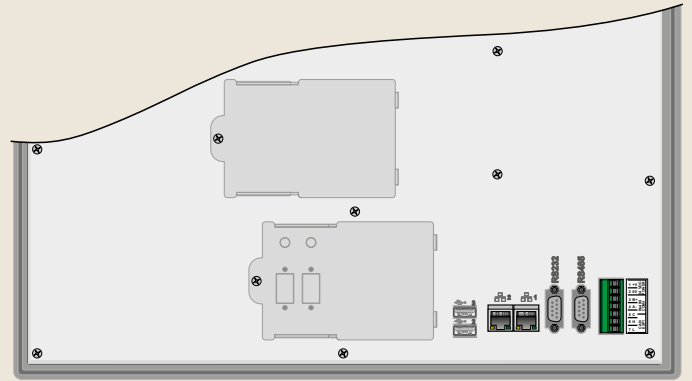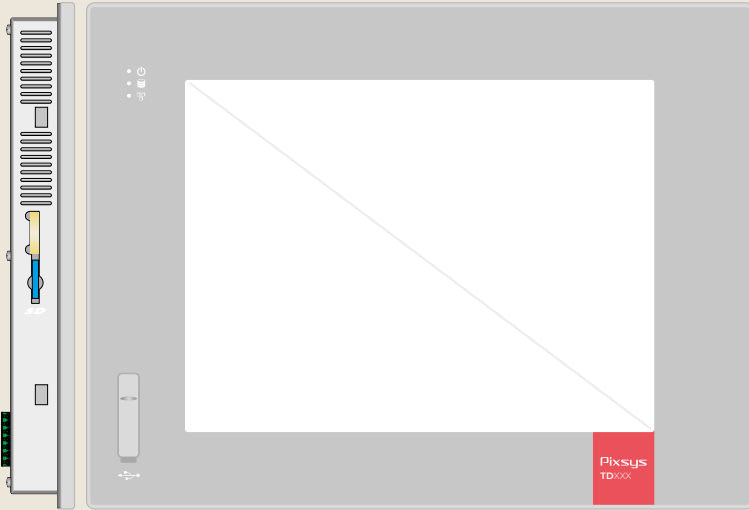

Main features



	TD750	TD850	TD860	TD900	TD910	TD920
DISPLAY	7" TFT 800 x 600	10.4" TFT 800 x 600	12.1" TFT 1280 x 800	15" TFT 1024 x 768	18.5" TFT 1366 x 768	21.5" TFT 1920 x 1080
TOUCH-SCREEN	Resistive	Resistive	Resistive	Resistive	Resistive	Resistive
DIMENSIONS (mm)	204 x 160 x 34	325 x 260 x 26	321 x 254 x 26	435 x 330 x 29	474 x 310 x 29	540 x 353 x 29
PANEL CUT-OUT (mm)	181 x 144	302 x 242	302 x 242	416 x 313	460 x 296	525 x 336
POWER SUPPLY	24 V DC - 12 W	24 V DC - 18 W	24 V DC - 20 W	24 V DC - 25 W	24 V DC - 28 W	24 V DC - 32 W
SERIAL PORTS	RS232 - RS485 - 3 USB					
ETHERNET	10 / 100 Mbit/s	2x 1 Gbit/s	2x 1 Gbit/s	2x 1 Gbit/s	2x 1 Gbit/s	2x 1 Gbit/s
EXPANSION I/O SLOT 1	○	Mini PCI Express (fieldbuses)				
EXPANSION I/O SLOT 2	○	Mini PCI Express (fieldbuses)				
SOFT-PLC	●	●	●	●	●	●
SOFTWARE FEATURES						
OPERATING SYSTEM	Windows® 10 IoT LTSB Enterprise 64bit					
CPU	Intel® Celeron® J1900 Quad Core @2.0GHz, 2M Cache					
RAM	4 GB DDR3	4 GB DDR3	4 / 8 GB DDR3		4 / 8 GB DDR3	
STORAGE: SSD Sata 2,5"	32GB	64GB	64 / 128 / 256GB			
FANLESS (0-45°C)	●	●	●	●	●	●
UPS (assisted shut down)	●	●	●	●	●	●
PROGRAMMING TOOLS						
LOGICLAB (logics)	●	●	●	●	●	●
MOVICON X86 (logics/graphics)	●	●	●	●	●	●